



**Agriculture**

# RIGEL

*Fixed subsoiler with 2V-shaped chassis*


The **RIGEL** subsoiler is the natural evolution of the original ANTARES model, for working on land with stubble or a lot of plant debris on the ground surface.

Its arms are distributed in two V-shaped chassis, so that there is a greater distance between the arms and a subsoiler with 3, 4, 5 or 6 rows of arms is obtained, with less resistance to the advance, saving fuel consumption and no clogging.


**“Save consumption and doesn’t get clogged”**



Model RIGEL-7-2V-550-PL with cast steel boots and double roller Ø 580 mm

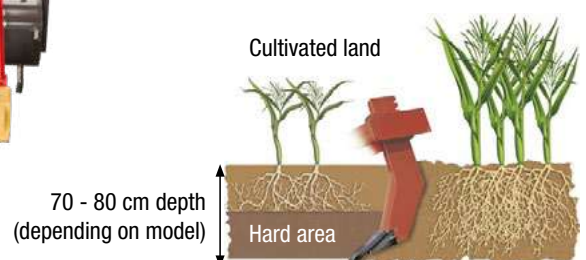

## Accessories

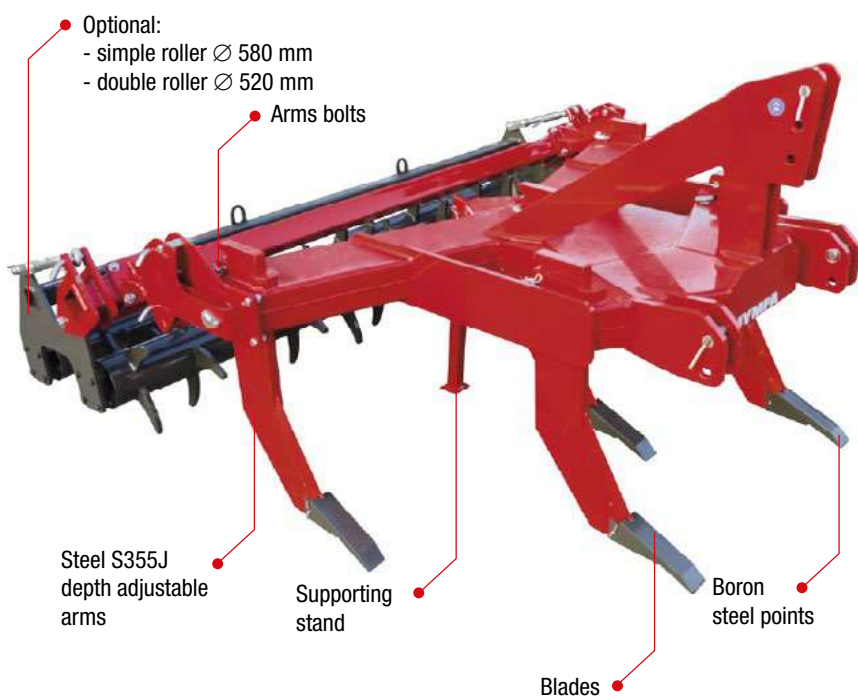

Model RIGEL-5R-2V with double roller  $\varnothing$  520 mm



Simple roller  $\varnothing$  580 mm



Double roller  $\varnothing$  520 mm



Model RIGEL-9-2V-PC with simple roller  $\varnothing$  580 mm

Models with **hydraulic folding** also incorporate **non-return valves with flow regulators** and **anti-opening security system**.

Model	Required power HP	Folding	Distribution folded arms	Width without roller m	Width with single roller m	Width with double roller m	Working depth m	Clearance cm	No. arms	Arms section mm	Arms spacing cm	Hitch category	Approximate weight kg
RIGEL-5R-2V	130-160	Fixed	-	2,38	2,81	2,90	70	79	5	40x200	55 / 110	III	925
RIGEL-5-SR50-2V	140-180	Fixed	-	2,41	2,81	2,90	80	87	5	50x220	55 / 110	III	1.080
RIGEL-7-2V-440	150-200	Fixed	-	2,80	3,05	3,05	70	79	7	40x200	44 / 88	III	1.270
RIGEL-7-2V	150-200	Fixed	-	2,98	3,48	3,47	70	79	7	40x200	47 / 94	III	1.320
RIGEL-7-SR50-2V-440	180-250	Fixed	-	2,80	3,05	3,05	80	87	7	50x200	44 / 88	III	1.630
RIGEL-7-2V-550-PL	180-250	Lateral hydr.	1+5+1	3,48	3,83	3,93	70	79	7	40x200	55 / 110	III	1.545
RIGEL-9-2V	225-300	Fixed	-	4,38	4,83	4,92	75	86	9	40x245	52 / 104	III - IV	1.959
RIGEL-9-2V-PL	225-300	Lateral hydr.	1+7+1	3,80	4,10	4,20	75	86	9	40x245	44 / 88	III - IV	2.250
RIGEL-9-2V-PC	250-350	Lateral hydr.	4+1+4	4,40	4,62	4,74	75	86	9	40x245	50 / 100	III - IV	2.700
RIGEL-9-2V-XL-PL	250-350	Lateral hydr.	2+5+2	4,60	4,80	4,90	75	86	9	40x245	52 / 104	III - IV	2.400
RIGEL-9-SR50-2V-PC	300-400	Lateral hydr.	4+1+4	4,40	4,62	4,74	80	87	9	50x220	50 / 100	III - IV	3.100
RIGEL-11-2V-PL	300-400	Lateral hydr.	2+7+2	4,90	5,20	5,30	75	86	11	40x245	44 / 88	III - IV	3.600

— Models with hydraulic folding. When folded, their total width is less than or equal to 3,05 m.

\*Models with total width > 3,05 m (please refer to the current traffic regulations in force in your country).